

Optical Properties of Solids: Lecture 3

Stefan Zollner

New Mexico State University, Las Cruces, NM, USA
and Institute of Physics, CAS, Prague, CZR (Room 335)
zollner@nmsu.edu or zollner@fzu.cz

These lectures were supported by

- European Union, European Structural and Investment Funds (ESIF)
- Czech Ministry of Education, Youth, and Sports (MEYS), Project IOP Researchers Mobility – CZ.02.2.69/0.0/0.0/0008215

Thanks to Dr. Dejneka and his department at FZU.



EUROPEAN UNION
European Structural and Investment Funds
Operational Programme Research,
Development and Education



MINISTRY OF EDUCATION,
YOUTH AND SPORTS



Optical Properties of Solids: Lecture 3





Maxwell's Equations in Vacuum, Plane Waves

Polarized Light

Stokes Parameters, Poincare Sphere

Jones Vectors, Jones Matrix, Mueller Matrix

Decoherence and Depolarization

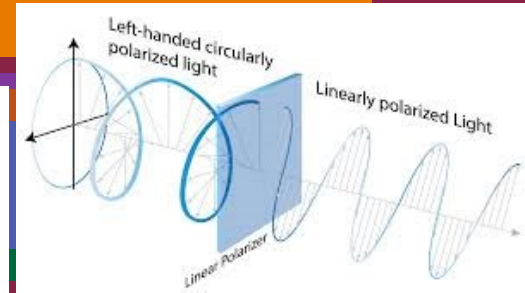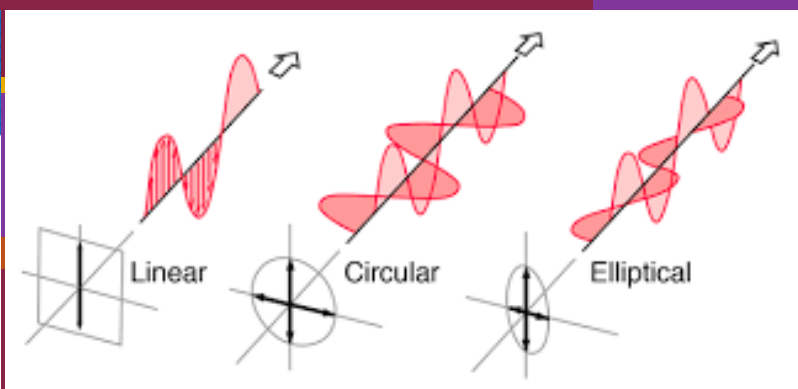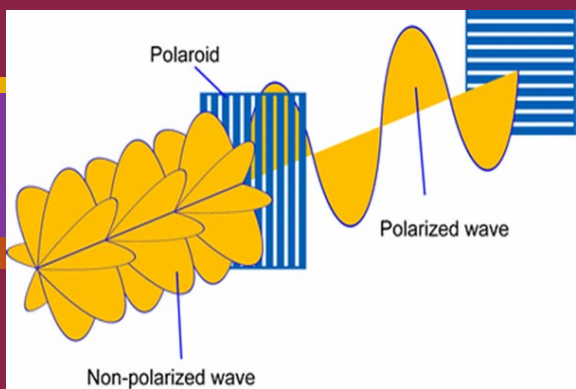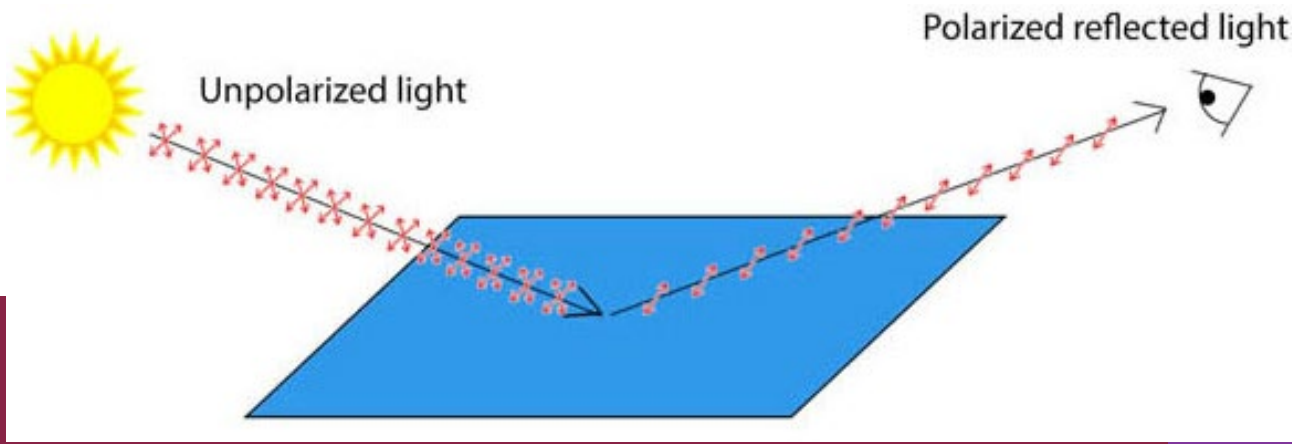

References: Maxwell's Equations and Ellipsometry

Standard Texts on Electricity and Magnetism:

- J.D. Jackson: *Classical Electrodynamics*
- Landau & Lifshitz, Vol. 2: *Classical Theory of Fields*
- D.E. Aspnes: ***Practical Electrodynamics*** (forthcoming)

Optics:

- E. Hecht: *Optics*
- M. Born, E. Wolf: *Principles of Optics*

Ellipsometry and Polarized Light:

- R.M.A. Azzam and N.M. Bashara: *Ellipsometry and Polarized Light*
- **H.G. Tompkins and E.A. Irene: *Handbook of Ellipsometry* (chapter by Josef Humlicek)**
- H. Fujiwara, *Spectroscopic Ellipsometry*
- H.G. Tompkins and J.N. Hilfiker: *Spectroscopic Ellipsometry*
- H. Fujiwara and R.W. Collins: *Spectroscopic Ellipsometry for PV* (Vol 1+2)
- Zollner: *Propagation of EM Waves in Continuous Media* (Lecture Notes)

Scalars and Vectors

- **Scalar:** Invariant under rotations and inversion
- **Vector:** Transforms like x,y,z under rotation. Sign change under inversion
- **Pseudoscalar:** Invariant under rotations, sign change under inversion
- **Pseudovector:** Transforms like x,y,z under rotation. Invariant under inversion.

$O_h(m-3m)$	#	1	4	2_{100}	3	2_{110}	-1	-4	m_{100}	-3	m_{110}	functions
Mult.	K	1	6	3	8	6	1	6	3	8	6	.
A_{1g}	Γ_1^+	1	1	1	1	1	1	1	1	1	1	$1, x^2+y^2+z^2$
A_{1u}	Γ_1^-	1	1	1	1	1	-1	-1	-1	-1	-1	.
A_{2g}	Γ_2^+	1	-1	1	1	-1	1	-1	1	1	-1	.
A_{2u}	Γ_2^-	1	-1	1	1	-1	-1	1	-1	-1	1	xyz
E_g	Γ_3^+	2	0	2	-1	0	2	0	2	-1	0	$(2z^2-x^2-y^2, x^2-y^2)$
E_u	Γ_3^-	2	0	2	-1	0	-2	0	-2	1	0	.
T_{2u}	Γ_5^-	3	-1	-1	0	1	-3	1	1	0	-1	.
T_{2g}	Γ_5^+	3	-1	-1	0	1	3	-1	-1	0	1	(xy, xz, yz)
T_{1u}	Γ_4^-	3	1	-1	0	-1	-3	-1	1	0	1	(x, y, z)
T_{1g}	Γ_4^+	3	1	-1	0	-1	3	1	-1	0	-1	(J_x, J_y, J_z)

Scalar

Pseudoscalar

Vector

Pseudovector

BSW

Γ_1

Γ_1'

Γ_2

Γ_2'

Γ_{12}

Γ_{12}'

Γ_{25}

Γ_{25}'

Γ_{15}

Γ_{15}'

Scalar and Vector Waves

- **Field:** Scalar or vector depends on position \mathbf{r} .
- **Physical quantities are always real**
Scalar: energy, charge, etc.
Vector: momentum, current density, electric field, etc.

- Scalar wave

$$s(\vec{r}, t) = A \cos(\vec{k} \cdot \vec{r} - \omega t + \varphi)$$

- Vector wave

$$\vec{E}(\vec{r}, t) = \vec{E}_0 A \cos(\vec{k} \cdot \vec{r} - \omega t + \varphi)$$

- **Where do the complex notations come from?**

Fourier Series of Periodic Functions

- A real-valued scalar function $f(t)$ is called **periodic** with period T , if $f(t)=f(t+T)$ for all values of t .

- A periodic scalar function with period T can be written as a **Fourier Series**



$$f(t) = \frac{1}{2}A_0 + \sum_{m=1}^{\infty} [A_m \cos(m\omega t) + B_m \sin(m\omega t)]$$

with angular frequency $\omega=2\pi/T$ and Fourier coefficients

$$A_m = \frac{\omega}{\pi} \int_{-\frac{\pi}{\omega}}^{\frac{\pi}{\omega}} f(t) \cos(m\omega t) dt$$

$$B_m = \frac{\omega}{\pi} \int_{-\frac{\pi}{\omega}}^{\frac{\pi}{\omega}} f(t) \sin(m\omega t) dt$$

Jackson, E&M, 1975

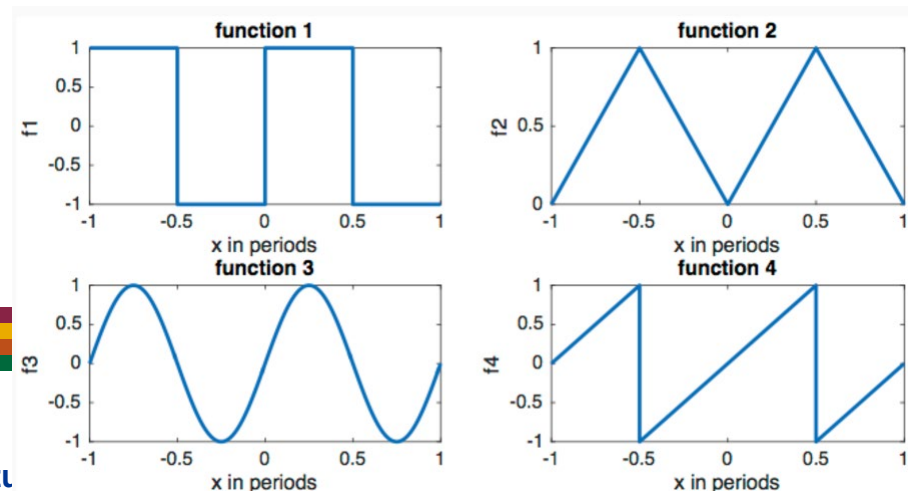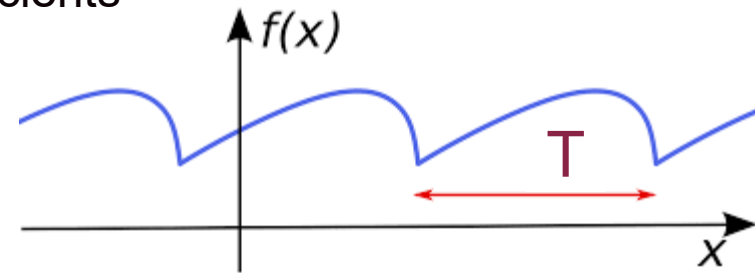

Fourier Series of Periodic Functions

- Dealing with harmonic functions (sin, cos) is not convenient, because
 - We need two functions for each harmonic.
 - Taking derivatives is not easy, because sin and cos switch at each order.
- A periodic scalar function with period T can be written as a **Fourier Series**

$$f(t) = \sum_{m=-\infty}^{\infty} c_m \exp(-im\omega t)$$

with **complex** Fourier coefficients

$$c_m = \frac{\omega}{\pi} \int_{-\frac{\pi}{\omega}}^{\frac{\pi}{\omega}} f(t) \exp(im\omega t) dt = \begin{cases} \frac{A_0}{2} & m = 0 \\ \frac{1}{2}(A_m + iB_m) & m > 0 \\ \frac{1}{2}(A_{-m} - iB_{-m}) & m < 0 \end{cases}$$

- The Fourier coefficients are now complex, but the function $f(t)$ is still real.
- The imaginary parts all cancel, if the complex coefficients c_m are defined correctly.

Jackson, E&M, 1975

Fourier Transforms of Non-Periodic Functions

- If the function $f(t)$ is not periodic, then the period T becomes infinite and the frequency spacing ω between overtones becomes very small.

- The Fourier series now becomes a **Fourier Integral**.

$$f(t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} F(\omega) \exp(-i\omega t) d\omega$$

with the **Fourier transform $F(\omega)$**

$$F(\omega) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} f(t) \exp(i\omega t) dt$$

- The prefactors $1/\sqrt{2\pi}$ before the integral can vary.
- **The Fourier transform function $F(\omega)$ may be complex, because it is not a meaningful physical quantity.**
- Orthogonality and completeness:

$$\frac{1}{2\pi} \int_{-\infty}^{\infty} \exp[i(\omega - \omega')t] dt = \delta(\omega - \omega')$$
$$\frac{1}{2\pi} \int_{-\infty}^{\infty} \exp[i\omega(t - t')] d\omega = \delta(t - t')$$

$$\frac{1}{\sqrt{2\pi}} \exp(i\omega t)$$

Orthonormal basis of
Hilbert Space of real functions

Math with Fourier Transforms

- Convolution theorem:

The Fourier transform of a convolution equals the product of the Fourier transforms.

$$(f * g)(t) = \int_{-\infty}^{\infty} f(t')g(t - t')dt'$$

$$\frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} (f * g)(t) \exp(i\omega t) dt = \sqrt{2\pi} F(\omega) G(\omega)$$

- The Fourier transform of the derivative of $f(t)$ equals $i\omega F(\omega)$.

$$\frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} f'(t) \exp(i\omega t) dt = i\omega F(\omega)$$

- The complex conjugate of the Fourier transform equals $F(-\omega)$.

$$\overline{F(\omega)} = F(-\omega)$$

Jackson, E&M, 1975

Fourier Series in Multiple Dimensions

- A real-valued **scalar field** $s(\mathbf{r})$ in a Bravais lattice (with Bravais lattice vectors \mathbf{T} and reciprocal lattice vectors \mathbf{G}) is called **periodic**, if $s(\mathbf{r}+\mathbf{T})=s(\mathbf{r})$ for all Bravais lattice vectors \mathbf{T} .
- A real-valued periodic scalar field $s(\mathbf{r})$ in a Bravais lattice can be written as a **Fourier sum in reciprocal space**

$$s(\vec{r}) = \sum_{\vec{G}} s_{\vec{G}} \exp(i\vec{G} \cdot \vec{r})$$

with **complex Fourier coefficients**

$$s_{\vec{G}} = \frac{1}{V} \int_C s(\vec{r}) \exp(-i\vec{G} \cdot \vec{r}) d^3 \vec{r}$$

where C is the unit cell with volume V . \mathbf{G} is a reciprocal lattice vector.

- The same equations apply to a **real-valued periodic vector field** $\mathbf{E}(\mathbf{r})$.

$$\vec{E}(\vec{r}) = \sum_{\vec{G}} \vec{E}_{\vec{G}} \exp(i\vec{G} \cdot \vec{r})$$

$$\vec{E}_{\vec{G}} = \frac{1}{V} \int_C \vec{E}(\vec{r}) \exp(-i\vec{G} \cdot \vec{r}) d^3 \vec{r}$$

Fourier Transforms in Multiple Dimensions

- Fourier transforms can also be generalized to multiple dimensions for scalar fields

$$s(\vec{r}) = \left(\frac{1}{\sqrt{2\pi}}\right)^3 \iiint_{-\infty}^{\infty} S(\vec{k}) \exp(i\vec{k} \cdot \vec{r}) d^3\vec{k}$$

$$S(k) = \left(\frac{1}{\sqrt{2\pi}}\right)^3 \iiint_{-\infty}^{\infty} s(\vec{r}) \exp(-i\vec{k} \cdot \vec{r}) d^3\vec{r}$$

- and vector fields

$$\vec{E}(\vec{r}) = \left(\frac{1}{\sqrt{2\pi}}\right)^3 \iiint_{-\infty}^{\infty} \vec{E}(\vec{k}) \exp(i\vec{k} \cdot \vec{r}) d^3\vec{k}$$

$$\vec{E}(k) = \left(\frac{1}{\sqrt{2\pi}}\right)^3 \iiint_{-\infty}^{\infty} \vec{E}(\vec{r}) \exp(-i\vec{k} \cdot \vec{r}) d^3\vec{r}$$

- The fields $s(\mathbf{r})$ and $\mathbf{E}(\mathbf{r})$ in real space have real values.
- **The Fourier transforms $S(\mathbf{k})$ and $\mathbf{E}(\mathbf{k})$ have complex values, but their imaginary parts cancel out in the summation.**

Microscopic Maxwell's Equations (in Vacuum)

- Electric field strength $\mathbf{E}(\mathbf{r})$
- Magnetic field strength $\mathbf{H}(\mathbf{r})$
- Current density $\mathbf{j}(\mathbf{r})$, charge density $\rho(\mathbf{r})$
- Permittivity of free space ϵ_0 , permeability of free space μ_0 .

$$\vec{\nabla} \cdot \vec{E} = \frac{\rho}{\epsilon_0} = 0$$

Gauss' Law (Coulomb)

$$\vec{\nabla} \cdot \vec{H} = 0$$

Gauss' Law (magnetic field)

$$\vec{\nabla} \times \vec{E} = -\mu_0 \frac{\partial \vec{H}}{\partial t}$$

Faraday's Law (Lenz)

$$\vec{\nabla} \times \vec{H} = \vec{j} + \epsilon_0 \frac{\partial \vec{E}}{\partial t} = \epsilon_0 \frac{\partial \vec{E}}{\partial t}$$

Ampere's Law

- Homogeneous (in vacuum), linear, first-order, constant coefficients, partial DEQ.
- Vector analysis can be used (Stokes' Theorem) to transform Maxwell's equations into integral form.
- Introduce speed of light $c = \frac{1}{\sqrt{\epsilon_0 \mu_0}}$
- Units: MKSA (SI).

Jackson, E&M, 1975



Wave Equations (in Vacuum)

- Electric field strength $\mathbf{E}(\mathbf{r})$; Magnetic field strength $\mathbf{H}(\mathbf{r})$.
- Maxwell's equations can be combined to obtain the vacuum wave equations (second order, linear, homogeneous, constant coefficients).

$$\vec{\nabla}^2 \vec{E} - \frac{1}{c^2} \frac{\partial^2 \vec{E}}{\partial t^2} = 0$$
$$\vec{\nabla}^2 \vec{H} - \frac{1}{c^2} \frac{\partial^2 \vec{H}}{\partial t^2} = 0$$

$$c = \frac{1}{\sqrt{\epsilon_0 \mu_0}}$$

- Plane wave solutions:

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$
$$\vec{H}(\vec{r}, t) = \vec{H}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

Why are the solutions complex ?

- Plane wave is not physical (infinite, monochromatic). Form Gaussian wave packets.
- Poynting vector indicates energy flow:

$$\vec{S} = \vec{E} \times \vec{H}$$

Plane-Wave Solutions to Maxwell's Equations (Vacuum)

- Electric field strength $\mathbf{E}(\mathbf{r})$; Magnetic field strength $\mathbf{H}(\mathbf{r})$.
- Any electric and magnetic field strength can be written as a Fourier-transform

$$\vec{E}(\vec{r}, t) = \left(\frac{1}{2\pi}\right)^2 \int d\omega \iiint d^3\vec{k} \vec{E}(\vec{k}, \omega) \exp[i(\vec{k} \cdot \vec{r}) - \omega t]$$

$$\vec{E}(\vec{k}, \omega) = \left(\frac{1}{2\pi}\right)^2 \int dt \iiint d^3\vec{r} \vec{E}(\vec{r}, t) \exp[-i(\vec{k} \cdot \vec{r}) - \omega t]$$

- The Fourier transforms are complex, but the $\mathbf{E}(\mathbf{r})$ and $\mathbf{H}(\mathbf{r})$ fields are not.
- Signs: Nebraska convention as modified by Aspnes. Kinetic energy of free particle in quantum mechanics is positive. Classical wave travels along \mathbf{k} .
- The complex plane waves

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

$$\vec{H}(\vec{r}, t) = \vec{H}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

are just one term in the Fourier transform. The entire integral is real.
(Add complex conjugate.)

- **Solutions to Maxwell's equations are superpositions of plane waves.**

Fourier-transform Maxwell's Equations

- Substitute plane wave solutions into the differential form of Maxwell's Equations:

$$\vec{\nabla} \cdot \vec{E} = 0$$

Gauss' Law (Coulomb)

$$\vec{\nabla} \cdot \vec{H} = 0$$

Gauss' Law (magnetic field)

$$\vec{\nabla} \times \vec{E} = -\mu_0 \frac{\partial \vec{H}}{\partial t}$$

Faraday's Law

$$\vec{\nabla} \times \vec{H} = \varepsilon_0 \frac{\partial \vec{E}}{\partial t}$$

Ampere's Law

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

$$\vec{H}(\vec{r}, t) = \vec{H}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

$$\vec{k} \cdot \vec{E}_0 = 0$$

Gauss' Law (Coulomb)

$$\vec{k} \cdot \vec{H}_0 = 0$$

Gauss' Law (magnetic field)

$$\vec{k} \times \vec{E}_0 = \omega \mu_0 \vec{H}_0$$

Faraday's Law

$$\vec{k} \times \vec{H}_0 = -\omega \varepsilon_0 \vec{E}_0$$

Ampere's Law

Fourier-transform Maxwell's Equations

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

$$\vec{H}(\vec{r}, t) = \vec{H}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

$$\vec{k} \cdot \vec{E}_0 = 0 \quad \text{Gauss' Law (Coulomb)}$$

$$\vec{k} \cdot \vec{H}_0 = 0 \quad \text{Gauss' Law (magnetic field)}$$

$$\vec{k} \times \vec{E}_0 = \omega \mu_0 \vec{H}_0 \quad \text{Faraday's Law}$$

$$\vec{k} \times \vec{H}_0 = -\omega \varepsilon_0 \vec{E}_0 \quad \text{Ampere's Law}$$

$$k^2 = \frac{\omega^2}{c^2} \quad \text{Wave equation (Dispersion relation)}$$

Any solution to Maxwell's equation in vacuum can be written as a superposition of plane waves.

EM waves are transverse (\mathbf{E} , \mathbf{H} perpendicular to \mathbf{k}).

$\mathbf{E} \perp \mathbf{H}$, $E_0 = Z_0 H_0$, $Z_0 = \sqrt{\mu_0 / \varepsilon_0} = 377 \, \Omega$ impedance of vacuum.

Polarized Light; Jones Vectors

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

- Select \mathbf{k} along the z-axis. Then two field components E_x and E_y are sufficient.


$$\vec{E}(\vec{r}, t) = \begin{pmatrix} E_{0x} \\ E_{0y} \end{pmatrix} \exp[i(kz - \omega t)]$$

- An EM wave is described by seven (7) real quantities:
 - Direction of wave vector (two angles ϕ and θ).
 - Magnitude of wave vector (and angular frequency).
 - Two complex amplitudes E_{0x} and E_{0y} (**Jones vector**).
 - One of these (**absolute phase**) cannot be measured; leaving six parameters.


$$\begin{pmatrix} E_{0x} \\ E_{0y} \end{pmatrix} = E_0 \begin{pmatrix} X \exp i\Delta_X \\ Y \exp i\Delta_Y \end{pmatrix} = E_0 \begin{pmatrix} \sin \psi \exp i\Delta \\ \cos \psi \end{pmatrix} \exp i\Delta_y$$

- We don't care about the **light intensity** and the absolute phase.
- **ψ and Δ are called the ellipsometric angles; describe polarization of wave.**
- **$\psi = \arctan(X/Y)$; $\Delta = \Delta_X - \Delta_Y$; $\rho = \tan \psi \exp(i\Delta)$;**


Polarized Light; Jones Vectors

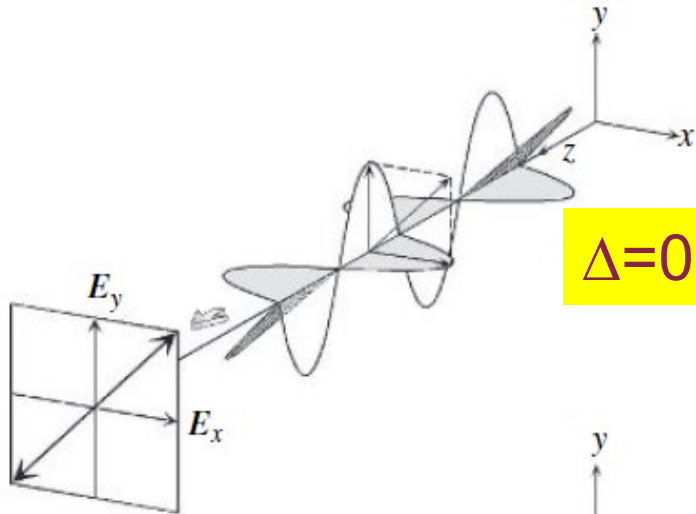

(a) Linear polarization

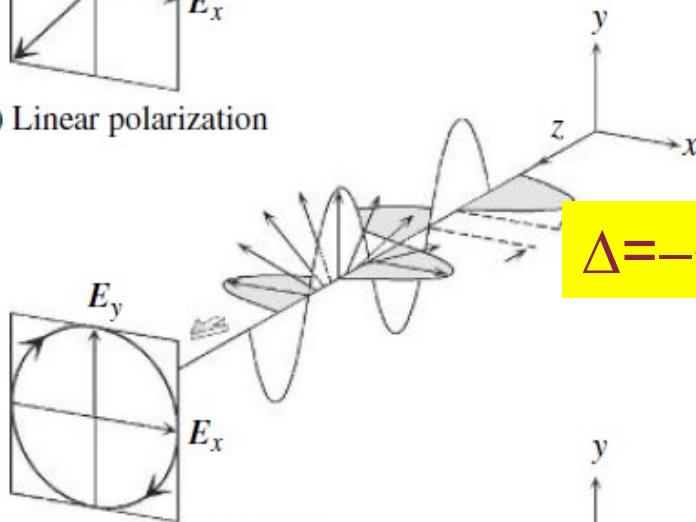


(b) Right-circular polarization

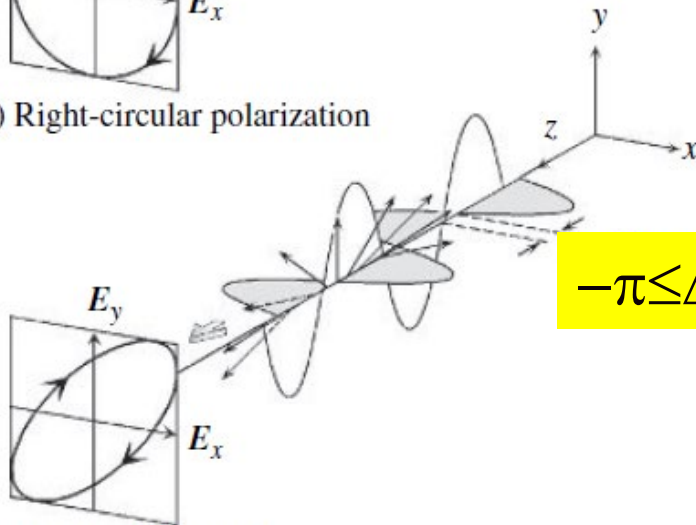

(c) Elliptical polarization

Jones Vector

$$\begin{pmatrix} \sin \psi \exp i\Delta \\ \cos \psi \end{pmatrix}$$

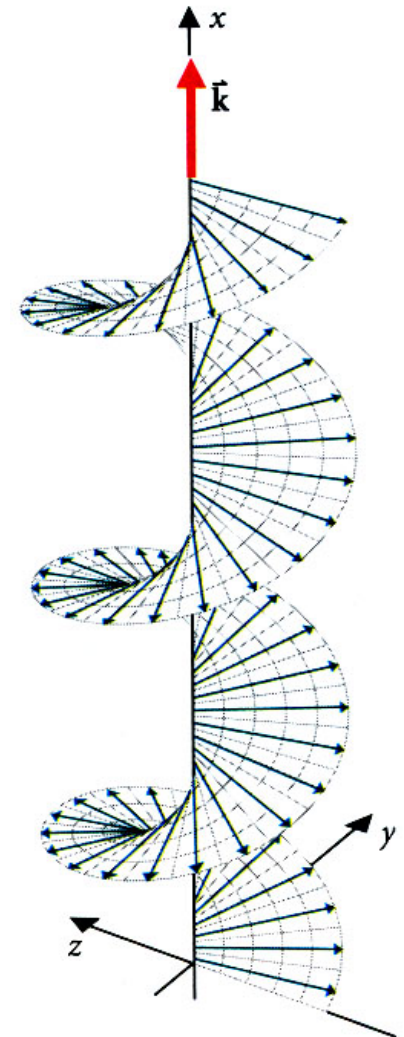

Polarized Light; Jones Vectors


Polarization	Polarization state	Jones vector	
Linear polarization parallel to x axis		p-polarized $\begin{bmatrix} 1 \\ 0 \end{bmatrix}$	$\Delta=0$ $\psi=\pi/2$
Linear polarization parallel to y axis		s-polarized $\begin{bmatrix} 0 \\ 1 \end{bmatrix}$	$\Delta=0$ $\psi=0$
Linear polarization oriented at 45°		$\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix}$	$\Delta=0$ $\psi=\pi/4$
Right-circular polarization		right-circular $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ i \end{bmatrix}$	$\Delta=-\pi/2$ $\psi=\pi/4$
Left-circular polarization		left-circular $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -i \end{bmatrix}$	$\Delta=\pi/2$ $\psi=\pi/4$
Elliptical polarization		elliptical $\begin{bmatrix} \sin \psi \exp(i\Delta) \\ \cos \psi \end{bmatrix}$	$-\pi \leq \Delta \leq \pi$ $0 \leq \psi \leq \pi/2$

The polarization state of polarized light can be described with two parameters ψ and Δ called **ellipsometric angles**.

Polarization Ellipse

$$\vec{E}(z = 0, t) = E_0 \begin{pmatrix} \sin \psi \exp i\Delta \\ \cos \psi \end{pmatrix} \exp[-i\omega(t - \tau)t]$$

At $z=0$, the electric field vector traces out an ellipse.

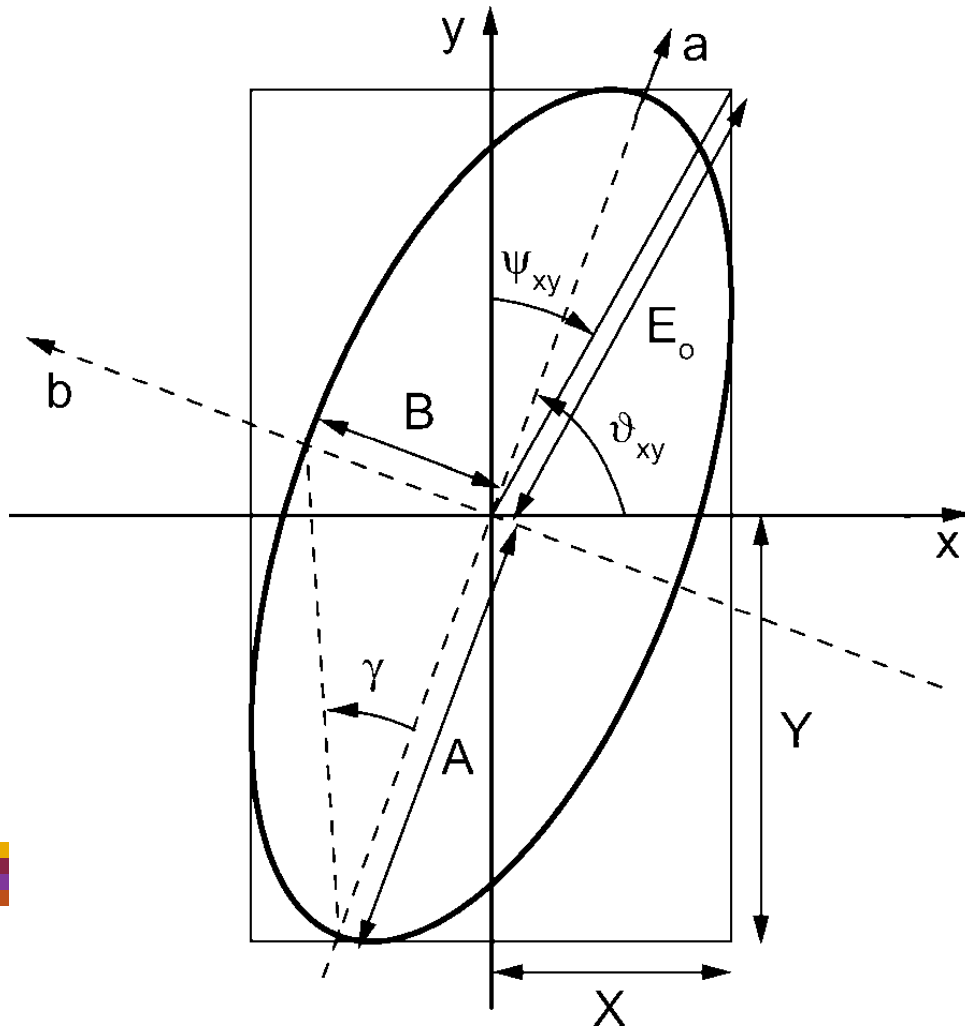


Parameters of the ellipse:

- Azimuth ϑ
- Ratio $\tan \gamma$ major/minor axis
Ellipticity $e = \tan \gamma = B/A$
can be calculated from ψ, Δ .

Representation of Polarized Light by Complex Numbers

$$\vec{E}(z = 0, t) = E_0 \begin{pmatrix} \sin \psi \exp i\Delta \\ \cos \psi \end{pmatrix} \exp[-i\omega(t - \tau)t]$$

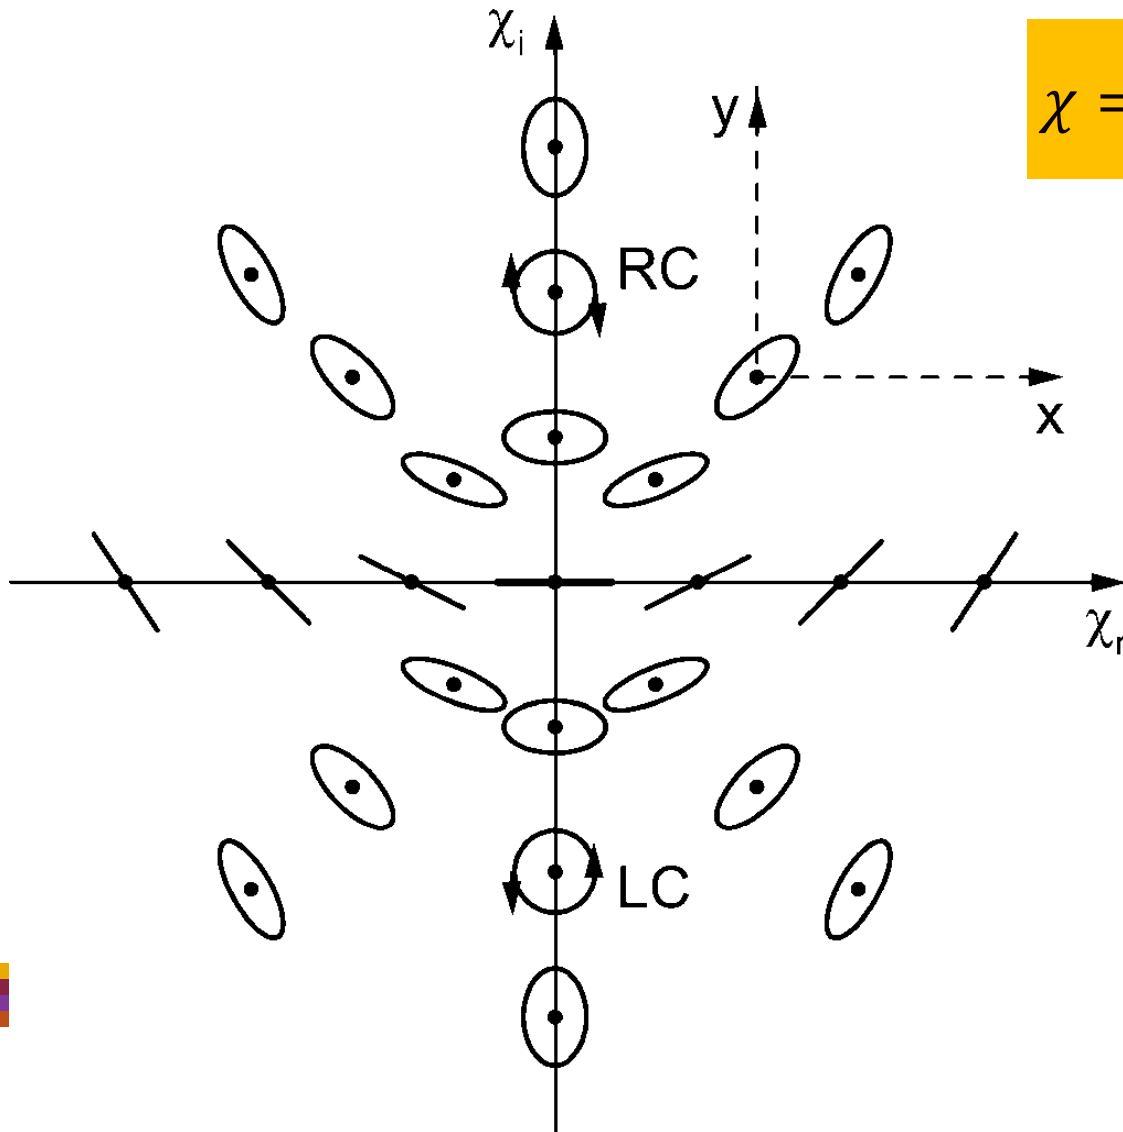

$$\chi = \frac{\exp i\Delta}{\tan \psi} = \frac{\tan \vartheta + i \tan \gamma}{1 - i \tan \vartheta \tan \gamma}$$

Complex number χ is related to ellipticity and azimuth of the polarization ellipse.


Also **Jones ratio**:

$$\rho = \tan \psi \exp i\Delta = \frac{E_x}{E_y}$$

Optical Elements

calcite prism

wire grid (IR)

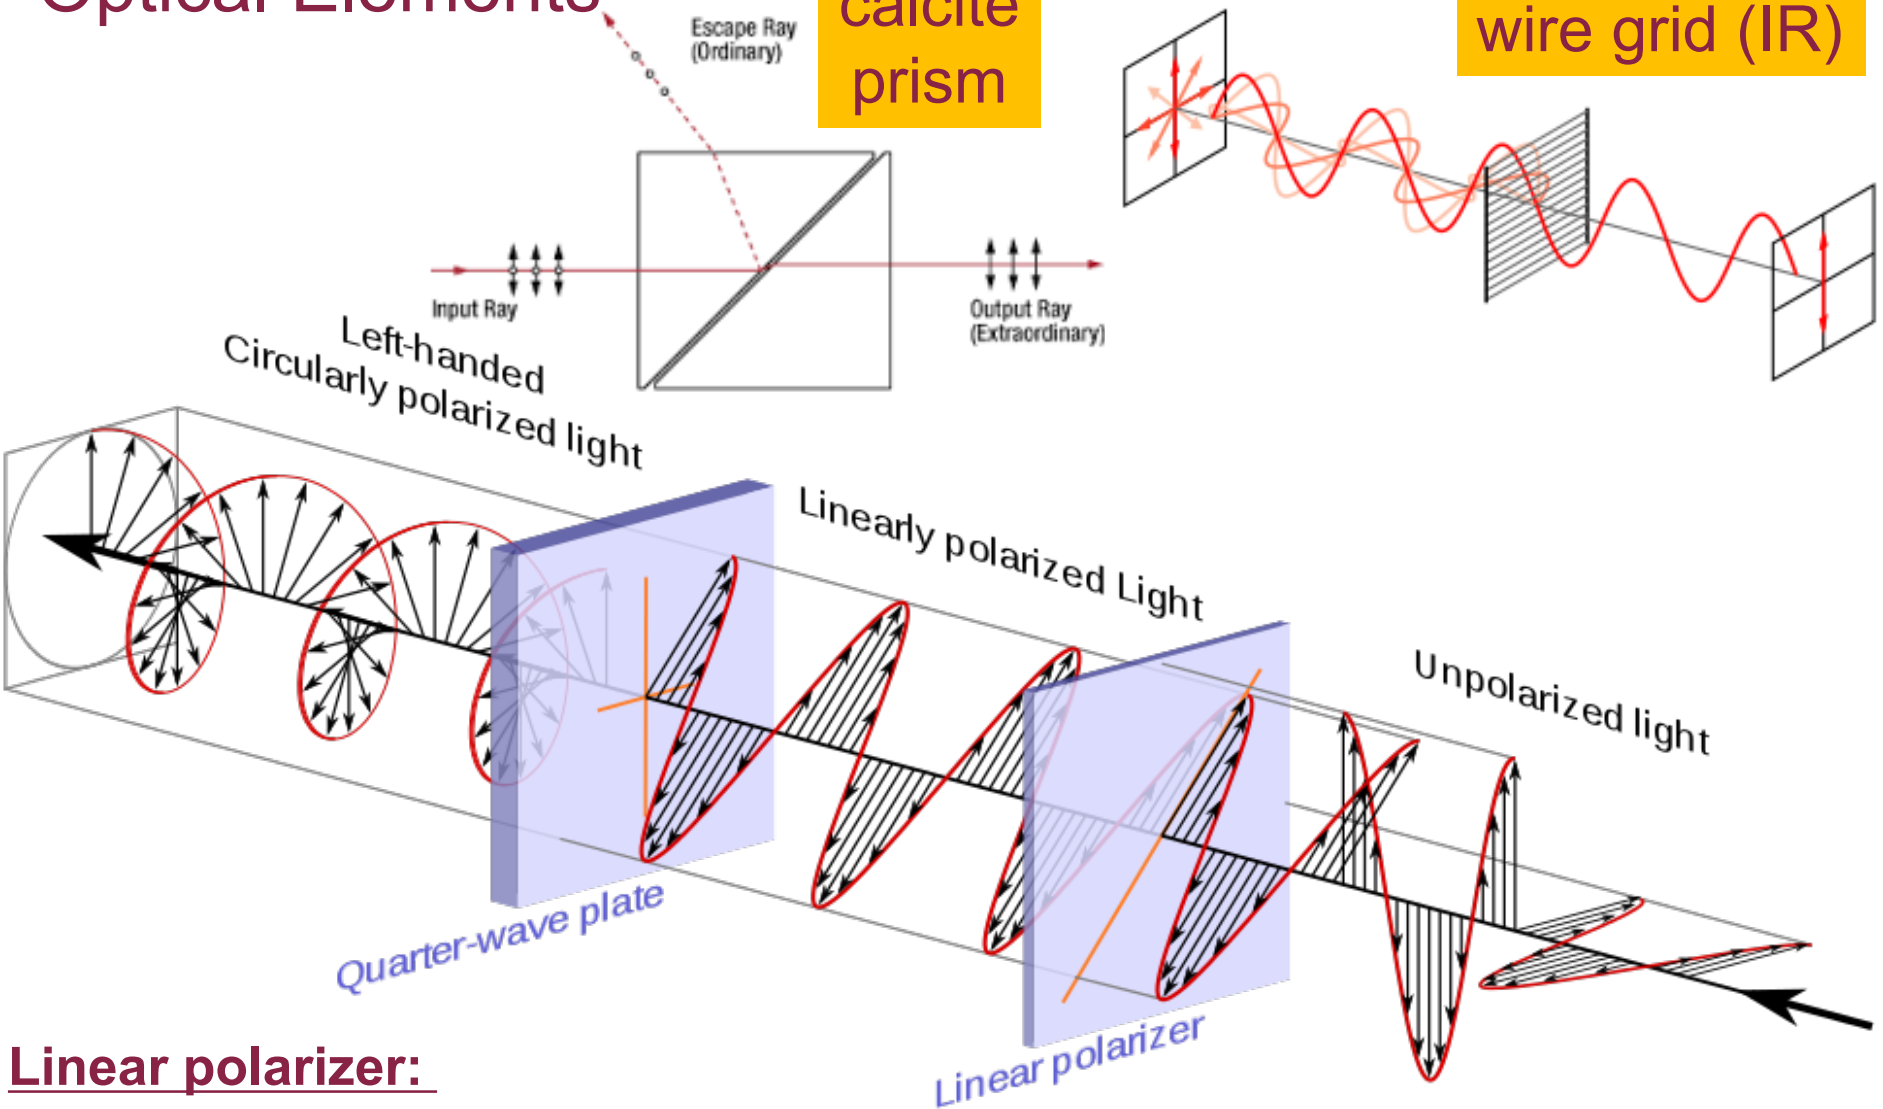

Linear polarizer:

Mica sheet, Prism (VIS/UV), wire grid (IR), metallic mirrors (VUV)

Compensator/retarder:

Quarter-wave plate

$$\Delta = \frac{2\pi}{\lambda} |n_e - n_o| d = \frac{\pi}{2}$$

H. Fujiwara







Decoherence and Depolarization

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

In practice, light sources are superpositions with several frequencies, called **wave packets**.

Similarly, light sources have **mixed polarization states**.

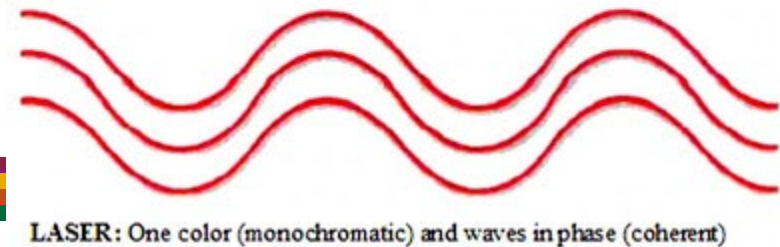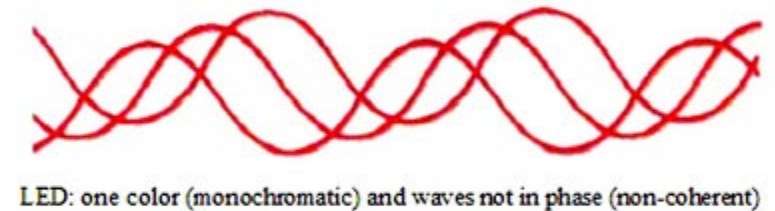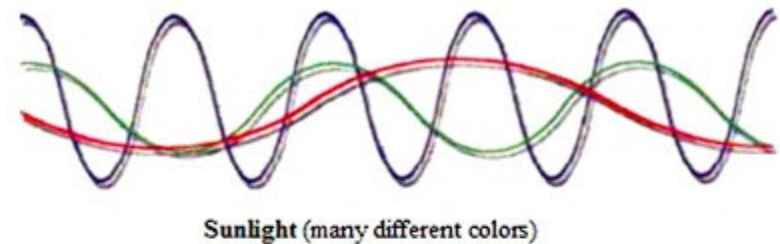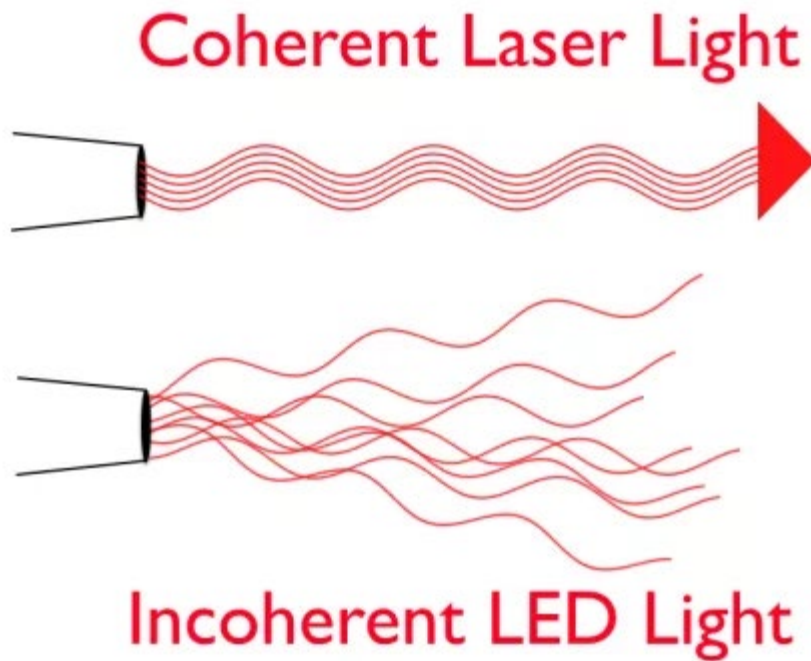

Stokes Parameters

$$\vec{E}(\vec{r}, t) = \vec{E}_0 \exp[i(\vec{k} \cdot \vec{r} - \omega t)]$$

$$S_0 = I_x + I_y = E_x E_x^* + E_y E_y^*$$

$$S_1 = I_x - I_y = E_x E_x^* - E_y E_y^*$$

$$S_2 = I_{45^\circ} - I_{-45^\circ} = E_x E_y^* + E_x^* E_y$$

$$S_3 = I_R - I_L = 2 \operatorname{Re}(E_x^* E_y)$$

Total intensity

S-polarized minus p-polarized

Diagonal difference

Right minus left circular

$$0 \leq p = \frac{\sqrt{S_1^2 + S_2^2 + S_3^2}}{S_0} \leq 1$$


$$\tan(2\vartheta) = \frac{S_2}{S_1}$$

$$\tan(2\gamma) = \frac{S_3}{\sqrt{S_1^2 + S_2^2}}$$

Degree of Polarization (%)

The Stokes parameters are related to the azimuth ϑ and ellipticity γ of the polarization ellipse.

Poincare Sphere

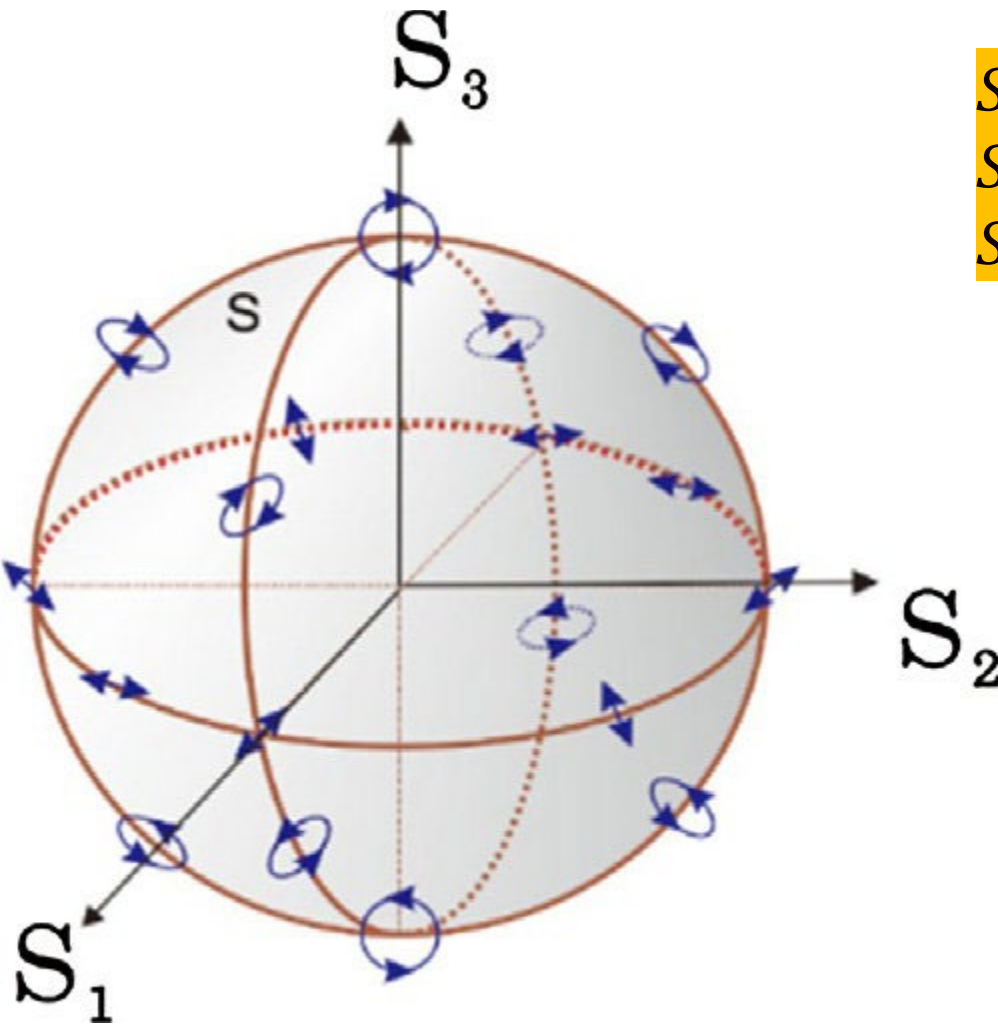


$$\begin{aligned} S_1 &= \cos 2\gamma \cos 2\vartheta = -\cos 2\psi \\ S_2 &= \cos 2\gamma \sin 2\vartheta = \sin 2\psi \cos \Delta \\ S_3 &= \sin 2\gamma = -\sin 2\psi \sin \Delta \end{aligned}$$

The Stokes parameters for completely polarized light, taken as coordinates, define a point in/on a sphere.

Poles: Circularly polarized
Equator: Linearly polarized

Partially Polarized Light

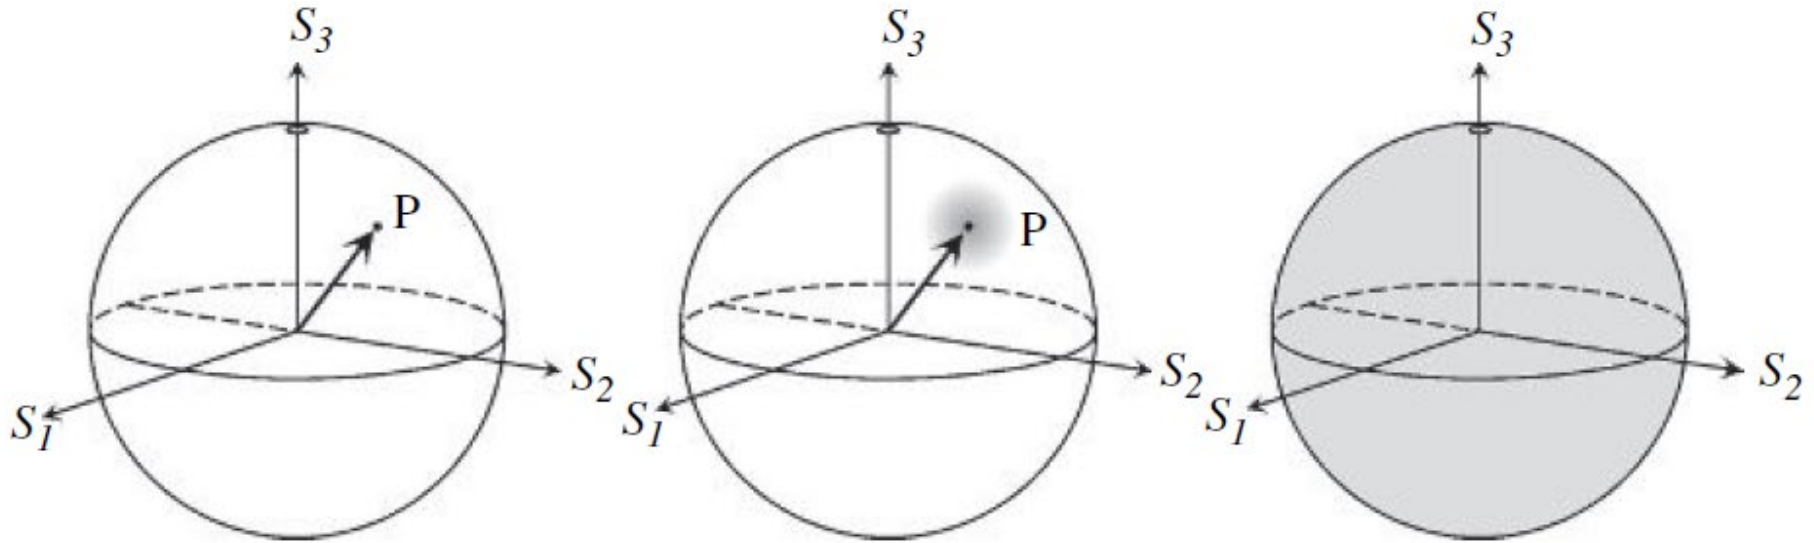

(a) Totally polarized light

(b) Partially polarized light

(c) Unpolarized light


Totally polarized light: point in the Poincaré sphere.

Partially polarized light: region in the sphere.

Jones Matrix

Optical element	Corresponding Jones matrix
Linear polarizer with axis of transmission horizontal ^[1]	$\begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}$
Linear polarizer with axis of transmission vertical ^[1]	$\begin{pmatrix} 0 & 0 \\ 0 & 1 \end{pmatrix}$
Linear polarizer with axis of transmission at $\pm 45^\circ$ with the horizontal ^[1]	$\frac{1}{2} \begin{pmatrix} 1 & \pm 1 \\ \pm 1 & 1 \end{pmatrix}$
Quarter-wave plate with fast axis vertical ^{[2][note 1]}	$e^{\frac{i\pi}{4}} \begin{pmatrix} 1 & 0 \\ 0 & -i \end{pmatrix}$
Quarter-wave plate with fast axis horizontal ^[2]	$e^{-\frac{i\pi}{4}} \begin{pmatrix} 1 & 0 \\ 0 & i \end{pmatrix}$
Half-wave plate with fast axis at angle θ w.r.t the horizontal axis ^[3]	$e^{-\frac{i\pi}{2}} \begin{pmatrix} \cos^2 \theta - \sin^2 \theta & 2 \cos \theta \sin \theta \\ 2 \cos \theta \sin \theta & \sin^2 \theta - \cos^2 \theta \end{pmatrix}$

Ellipsometry Measurement (simplified)

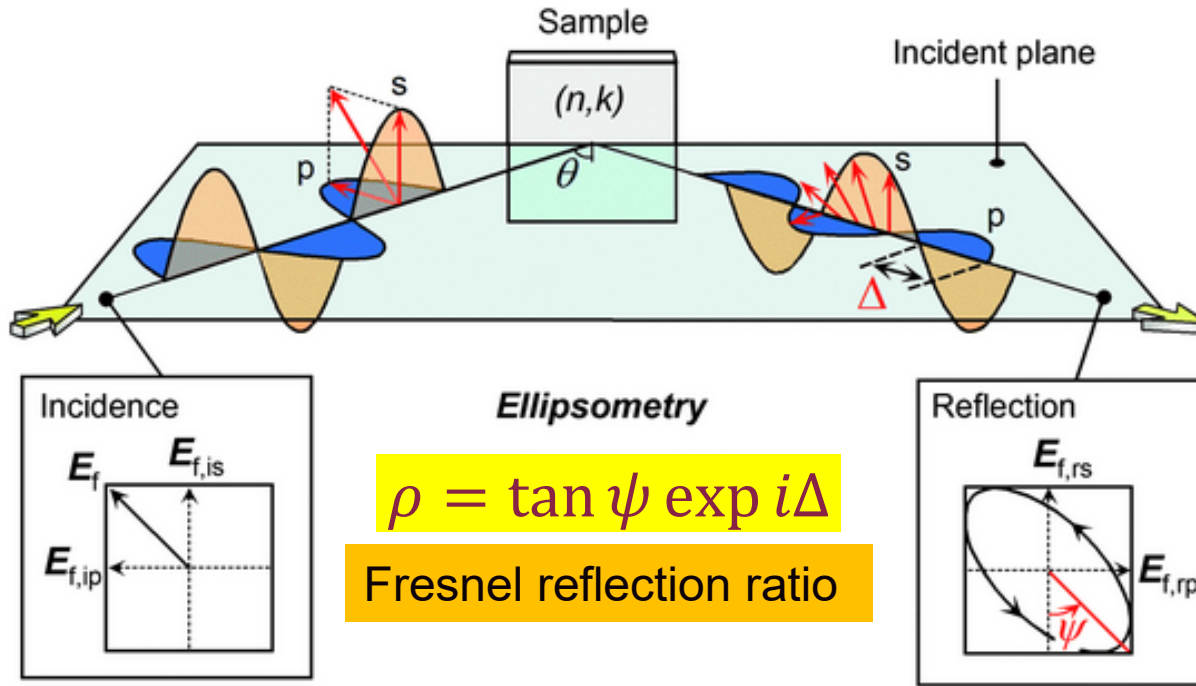

Polarization State
Jones Vector

$$J = \begin{pmatrix} E_{0x} \\ E_{0y} \end{pmatrix}$$

Ellipsometry Experiment

$$J_{out} = \begin{pmatrix} r_{pp} & r_{ps} \\ r_{sp} & r_{ss} \end{pmatrix} J_{in}$$

Fresnel reflection coefficients

$$\rho = \tan \psi \exp i\Delta$$

Fresnel reflection ratio

Anisotropy or depolarization
(not both)

Isotropic surface:
Off-diagonal elements vanish.

$$\begin{pmatrix} r_{pp} & r_{ps} \\ r_{sp} & r_{ss} \end{pmatrix} = r_{ss} \begin{pmatrix} \rho & 0 \\ 0 & 1 \end{pmatrix}$$

Ellipsometry: How does it work ?


Fresnel Reflectance ratio

$$\rho = \frac{R_p}{R_s} = \frac{E_{rp}}{E_{ip}} \cdot \frac{E_{is}}{E_{rs}} = \tan \Psi e^{i\Delta}$$

$$\tilde{\varepsilon} = \sin^2 \phi \left[1 + \tan^2 \phi \cdot \left(\frac{1 - \rho}{1 + \rho} \right)^2 \right]$$

Angle of incidence

We measure the change in the polarization state of light, when it is reflected by a flat surface (bulk).

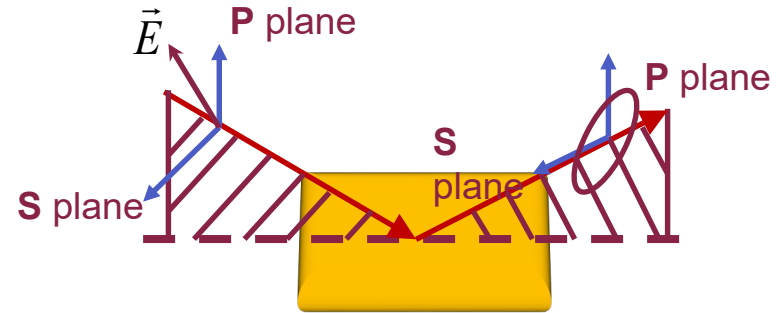

Result:

$$\tilde{\varepsilon} = \varepsilon_1 + i\varepsilon_2$$

Optical constants versus photon energy



Monochromator or Interferometer (λ)



polarizer

analyzer


detector




Bulk sample

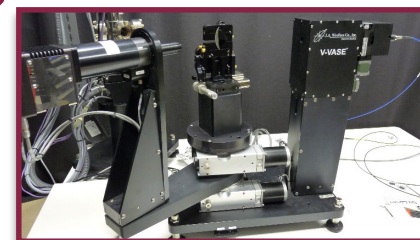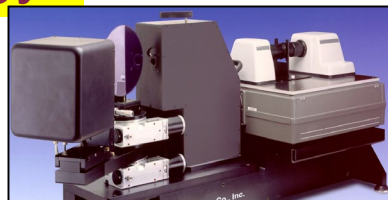

Ellipsometry Instrumentation

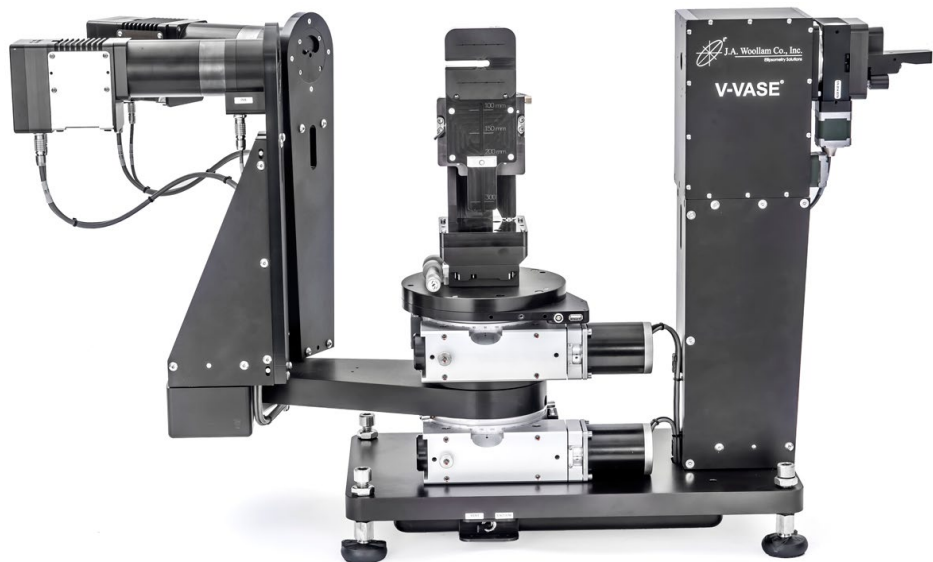


Mueller Matrix Ellipsometry

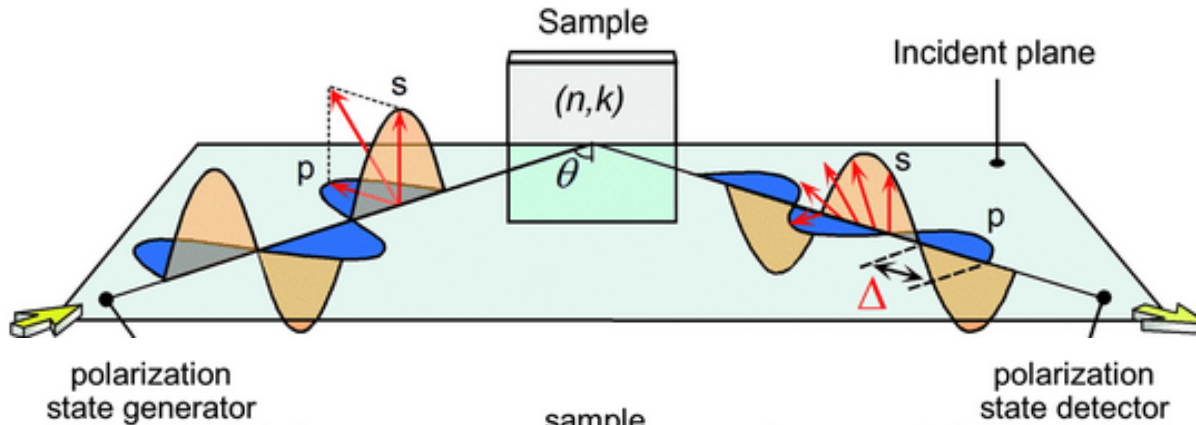

Polarization State
Stokes Vector

$$S = \begin{pmatrix} S_0 \\ S_1 \\ S_2 \\ S_3 \end{pmatrix}$$

Ellipsometry Experiment

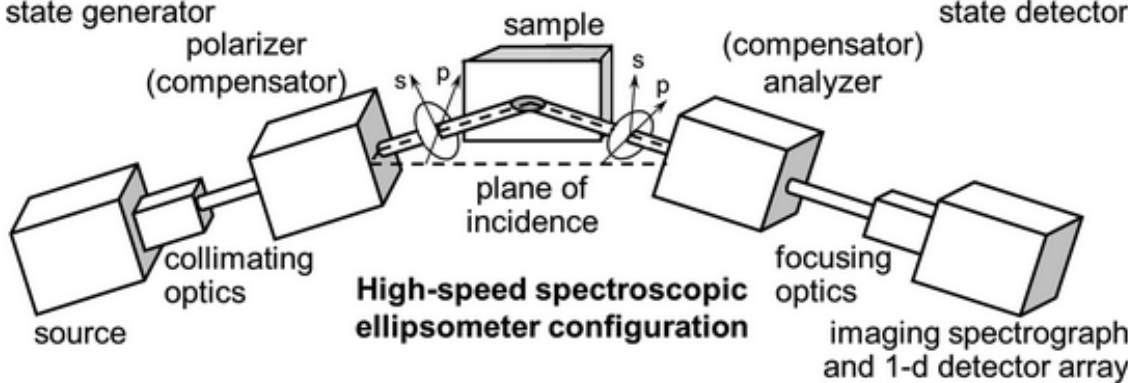

$$S_{out} = \hat{M} S_{in}$$

$$\hat{M} = \begin{pmatrix} M_{00} & M_{01} & M_{02} & M_{03} \\ M_{10} & M_{11} & M_{12} & M_{13} \\ M_{20} & M_{21} & M_{22} & M_{23} \\ M_{30} & M_{31} & M_{32} & M_{33} \end{pmatrix}$$


Measures anisotropy and depolarization
Requires two rotating compensators

Beetles, cancer research, magnetic field

Mueller Matrices

Isotropic sample, no depolarization

$$\mathbf{J}_{sample} = \begin{bmatrix} r_p & 0 \\ 0 & r_s \end{bmatrix}$$

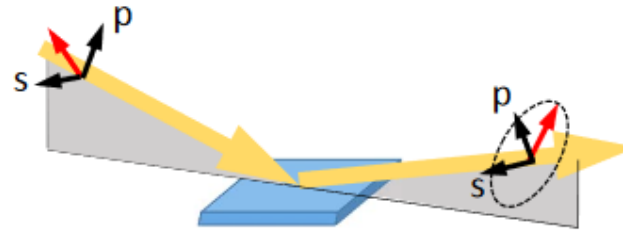

$$\mathbf{M}_{sample} = \begin{bmatrix} 1 & -N & 0 & 0 \\ -N & 1 & 0 & 0 \\ 0 & 0 & C & S \\ 0 & 0 & -S & C \end{bmatrix}$$

$$N = \cos(2\psi)$$

$$S = \sin(2\psi) \sin(\Delta)$$

$$C = \sin(2\psi) \cos(\Delta)$$

$$N^2 + S^2 + C^2 = 1$$

Standard ellipsometry:

- Thickness measurements of thin films
- Optical functions of isotropic materials

$$\rho = (\rho_{real} + i\rho_{imag}) = \frac{r_p}{r_s} = \tan(\psi) e^{i\Delta} = \frac{C + iS}{1 + N}$$

This Mueller matrix depends only on 2 parameters

Summary

- Fourier series and Fourier transforms
- Plane waves
- Maxwell's Equations in vacuum (general and plane-wave format)
- Polarized light
 - Jones and Stokes vectors
 - Polarization ellipse
 - Poincare sphere
- Ellipsometry experiments
 - Jones and Mueller matrices

